www.PapaCambridge.com

CAMBRIDGE INTERNATIONAL EXAMINATIONS

GCE Advanced Subsidiary Level and GCE Advanced Level

MARK SCHEME for the October/November 2013 series

9691 COMPUTING

9691/11

(Written Paper), maximum raw mark 75

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.

Cambridge will not enter into discussions about these mark schemes.

Cambridge is publishing the mark schemes for the October/November 2013 series for most IGCSE, GCE Advanced Level and Advanced Subsidiary Level components and some Ordinary Level components.

Page 2	Mark Scheme	Syllabu	er
	GCE AS/A LEVEL – October/November 2013	9691	123

1 1 mark for method + 1 mark for description Method must match description

observation

- watch system in operation first hand
- find out first hand where there are bottlenecks/problems with existing system

interviewing

- interview passengers and staff face to face
- alter questions according to responses given

questionnaires

- hand out written questionnaires with pre-tested questions
- avoids need for analyst to be present whilst gathering information

look at documentation/data flows

- if any documentation exists, then look through it to see what data needs to be handled by new system
- observe the data flow through the system to find out volumes of data, how data is collected, how data is processed and so on

2 (a) Any five from:

- graphics showing the process
- graphics mimic the process accurately/show how process links up
- use colours e.g. green = ON and red = OFF
- use flashing colours/sounds to show faults
- ability to click on graphics to show history/status
- easy to understand/use interface
- ability to easily move between process screens allowing monitoring of all stages in process
- use of sound to warn of problems or to indicate that monitoring is functioning correctly
- use of input devices such as touch screens and trackerballs
- use of output devices such as loud speakers/beepers and printers

Cambridge Com

Page 3	Mark Scheme	Syllabu
	GCE AS/A LEVEL – October/November 2013	9691
(b) 1 mark f	or each device and 1 marks for each reason	Candy.
touch s	creen	To the state of th
	elect (graphics to view status or start/stop parts of proces e able to easily navigate to other screens in the process	s)

touch screen

- to select (graphics to view status or start/stop parts of process)
- to be able to easily navigate to other screens in the process

trackerball

- to select (an item on the screen to change its status)
- to be able to easily navigate to other screens in the process

keyboard

to input values or type in queries/enter commands

[4]

3 (a) One point from each:

verification

- this is a way of preventing errors when data are copied from one medium to another
- e.g. double entry or visual checks on data
- verification does not check to see if data makes sense or are within acceptable boundaries:
- it only checks to see if original and copied data match exactly

validation

- this is a computer check on input data
- see if data matches certain criteria and are reasonable
- example e.g. range check

[2]

(b) (i) length check

[1]

(ii) range check

[1]

Page 4	Mark Scheme	Syllabu
	GCE AS/A LEVEL – October/November 2013	9691
30	3 2 1 4 5 ? = (5x3) + (4x0) + (3x4) + (2x5) = 15 + 0 + 12 + 10 = 37 divide 37 by 11 and get 3 remainder 4	Cambridge.com

sum =
$$(5x3) + (4x0) + (3x4) + (2x5)$$


= $15 + 0 + 12 + 10 = 37$
divide 37 by 11 and get 3 remainder 4

check digit is 4

(1 mark for a <u>reasonable</u> calculation + 1 mark for correct check digit allow follow through)

[2]

- (ii) Any two points from:
 - check digit for 34921 re-calculated
 - check digit value should be 7 (using modulo 11)
 - error will be flagged check digit is shown as 1 in transmitted number [2]
- (a) 1 mark for each correct logic gate

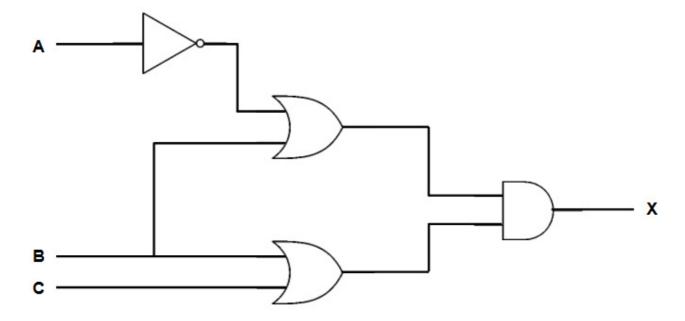

Page 5		Mai	rk Scheme		Syllabu	
	GCE	AS/A LEVEL -	October/Nov	vember 2013	9691	
(b)					Call	BAIC
, ,	Α	В	С	Х		On:
	0	0	0	0	1 mark	Se !
	0	0	1	1] }	.65
	0	1	0	1	1 mark	177
	0	1	1	1	f illiaik	

Α	В	С	Х	
0	0	0	0	} 1 mark
0	0	1	1) Tillaik
0	1	0	1	} 1 mark
0	1	1	1	f Tillaik
1	0	0	0	} 1 mark
1	0	1	0	f Tillaik
1	1	0	1	} 1 mark
1	1	1	1	J

5 (a) interrupt

signal sent to the processor (which causes a break in the execution of the current routine) [1]

[4]

(b) Any **three** from:

- data sent to printer buffer from memory
- buffer is then emptied to printer allowing user to get on editing document
- when buffer empty an interrupt is sent to processor from printer requesting more data
- current job suspended while buffer refills
- use continues editing document whilst buffer emptied contents to printer
- idea of interrupt priorities [4]

		32
Page 6	Mark Scheme	Syllabu
	GCE AS/A LEVEL – October/November 2013	9691
(0)	response depends on the software package	Car .

- (c) response depends on the software package
 - produces a dialogue box alerting user that virus has been found inviting user to up" the infected file
 - some systems remove viruses automatically and don't request user "permission"
 - quarantine the infected file/virus

[2]

(d) Any two points from:

- OS will allow one user <u>at a time</u> to use the computer
- each approved user is identified by a user id/password
- allows multi-tasking
- provides security for user files/profiles

[2]

6 (a) RAM

- contents can be altered/written to
- holds program/data currently in use
- volatile/temporary memory/contents lost on switching off
- usually has greater memory capacity than ROM

ROM

- contents can be read only/can't be altered
- holds bootstrap/BIOS/system data
- non-volatile/permanent memory/retains contents on switching off
- MAX 2 points from ROM and MAX 2 points from RAM

[3]

(b) RAM

- holds the data gathered from the sensors during monitoring
- holds user information entered into system
- holds part of OS/program, in current use

ROM

- holds program that is used to control the data logger
- holds the start-up routines when data logger set up for monitoring

[2]

Page 7	Mark Scheme	Syllabu	er
	GCE AS/A LEVEL – October/November 2013	9691	25

(c) 1 mark for device + 1 mark for application

vice	application
barcode/QR reader	automatic stock control
	library systems
rfid	tracking live stock
	timing athletes automatically in races
biometrics	security systems
	passports
magnetic stripes	credit/debit cards
	hotel key cards
OCR	checking signatures on documents
voice recognition	helping blind people interface with a computer
	system
smart (card) system	loyalty cards
	passports
OMR	automatically marking exam papers
MICR	banking/cheques [2]
	rfid biometrics magnetic stripes OCR voice recognition smart (card) system OMR

(b) Any four from:

- pH and oxygen sensors send data/signals to the data logger
- ADC
- data is stored in data logger's memory
- data is sampled at a set time interval (depending on memory size)
- data logger taken back to laboratory after monitoring period
- data is downloaded to a computer
- data logging software interprets information...
- ...and shows graphs of how oxygen and acidity levels changed over the monitoring period
- built in routines warn if levels dangerously high

[4]

Page 8	Mark Scheme	Syllabu. er
	GCE AS/A LEVEL – October/November 2013	9691

(a) 1 mark for each benefit and 1 mark for each drawback

					The .		
ge 8				Syllabu.	.0	er	
	GCE AS/A LEVEL – October/N	loven	nber 2013	9691	12	8	
1 mark fo	or each benefit and 1 mark for each	drawk	oack			a Cambridge	
benefit		dra	wback			Total	1
bus							CO
- othe	ires less cabling than the r topologies apest system to set up	- - -	if there is a fa cable, whole doesn't work less secure	system affe	entrai ected		
star							
netw - easi - easi - each cable	re in any connection and vork still functions er to identify faults er to expand network node can have different kind of e ore secure network	-	if central hub	·		k fails	
ring							
– work	s well under heavy loading	_	faulty connec		use who	le	
– poss	sible to form very large	_	difficult to exp	and this ty	pe of		

network

less secure

[6]

(b) 1 mark per point

networks

LAN

- hub
- (cat 5) network cabling
- network interface card (NIC)
- gateway
- server
- bridge
- switch

WAN

all the above plus:

- broadband modem
- telephone cabling/radio links/satellite links
- [3] router

			7.
	Page 9	Mark Scheme	Syllabu. er
		GCE AS/A LEVEL – October/November 2013	9691
8	(a) Any thre	ee from:	Campy
	– use	of formulas	3
	– <u>inbu</u>	<u>illt</u> functions	, C
		omatic graphs produced	OH OH
	– auto	omatic re-calculation of cells	
	66 I	- 4 · (C)	

8 (a) Any three from:

- use of formulas
- inbuilt functions
- automatic graphs produced
- automatic re-calculation of cells
- "what if" scenarios/predictions
- possible to install macros

(b) 1 mark for each advantage and 1 mark for each disadvantage

advantages

- often get better customer support since in direct contact with software designers/writers
- designed and written to meet unique user's specific requirements
- writers of software can develop it so it will not interfere with other software used in the
- users get exactly what they want therefore usually more user-friendly
- any modifications needed later on can be done more easily and quickly
- other companies cannot use the software (for the company alone)

disadvantages

- much greater dependence on software company (could go out of business)
- unlikely to be as well developed as off-the-shelf products
- usually much more expensive since all development costs have to be met by the customer
- development time may be very lengthy
- can be a gamble since final package may not exactly meet user requirements in a reasonable time scale
- no user groups or eq.

[4]

[2]

(c) Any two from:

- specialist control applications (e.g. nuclear plants)
- specialist monitoring applications (e.g. chemical process)
- modelling tasks
- virtual reality applications
- hospital/medical monitoring
- air traffic control

[3]

Page 10	Mark Scheme	Syllabu	er	ĺ
	GCE AS/A LEVEL – October/November 2013	9691	100	

- 9 (a) mimics knowledge and experience of human experts
 - uses knowledge base and inference engine to solve problems in a "human like" n

(b) 1 mark per point:

Cannot get max unless use all three parts

inputs

- engineer inputs the fault(s)
- answers on screen questions that are based on previous responses
- uses an interactive interface

processes

- expert system analyses data
- inference engine compares data/makes reasoned conclusions...
- ...with that held in/based on data in knowledge base
- ...uses the rule(s) base/set of inference rules
- until matches are found

outputs

- percent probability of fault
- how to fix the problem
- outputs reasons it produces a particular answer

[7]